

BlackJack SolderWerks BK3060 Soldering Station

INSTRUCTION MANUAL

Thank you for purchasing the BlackJack BK3060 Soldering Station.
Please read this manual before operating the equipment.
Keep manual in accessible place for future reference.

TABLE OF CONTENTS

Specifications	3
Safety Precautions	3
Initial Setup	4
Control Panel Guide	4
Normal Operation	5
Sleep Mode Adjustment	6
Celsius and Fahrenheit Scale	6
Programmable Quick Set	7
Digital Calibration	8
Care and Maintenance	9
Basic Troubleshooting Guide	9

SPECIFICATIONS

	Tweezer	Soldering Iron
Power consumption	60W peak	60W peak
Temperature range:	200°C - 450°C	200°C - 480°C
Heating Element	Ceramic Heater	Ceramic Heater
Voltage	24V	24V

*Specifications are subject to change without prior notice

SAFETY PRECAUTIONS

CAUTION: Improper usage can cause serious injury to personnel and/or damage to equipment. For personnel safety, please follow these precautions:


- Check each component after opening the package to make sure everything is in good condition. Do not use item if visible damage is seen, report the issue to your vendor.
- Power off unit and unplug the device when moving the device from one location to another.
- Do not subject the main unit to physical shock
 - Never drop or sharply jolt the unit.
 - Contains delicate parts that may break if the unit is dropped.
- Always connect power to a grounded receptacle.
- Tip temperature may reach as high as 480°C when switched ON.
 - Do not use the device near flammable materials.
 - Do not touch heated parts which may include tips, nozzles, barrels.
- Disconnect from power source if the unit will not be used for a long periods. Switch off power during short breaks.
- Use only genuine replacement parts.
- Soldering process produces smoke — use on well ventilated place.
- Do not try to alter or repair unit, bring to qualified service center for repairs.

Initial Setup

Soldering Iron

1. Install the solder wire to the soldering iron holder .
2. Follow Soldering stand assembly guide.
3. Connect the soldering iron cord assembly to the terminal found at the lower middle portion of the main unit.
4. Place the soldering iron to the soldering iron stand as shown above.
5. Dampen the sponge and place into sponge tray.

CONTROL PANEL GUIDE

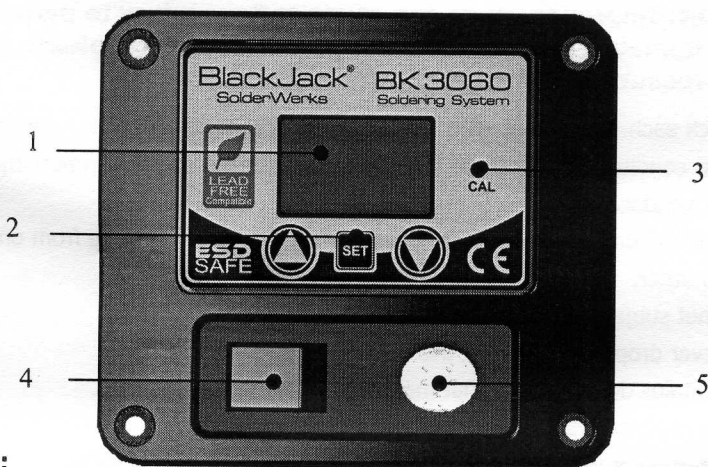

LEGEND:

- 1 — Temperature Display
- 2 — Soldering Iron Temp Control Buttons
 - ▲ Increase temperature
 - ▼ Decrease temperature
 - SET Set
- 3 — Calibration adjustment
- 4 — Main Power Switch
- 5 — Soldering Iron Receptacle

