




Hantek 100MHz X1-X10 Oscilloscope Probe - PP150

Sold and supported in the United States, [buy the Hantek PP-150 at CircuitSpecialists.com](https://www.circuitspecialists.com)

Oscilloscope Probe Kit

HanTek PP-80/150/200

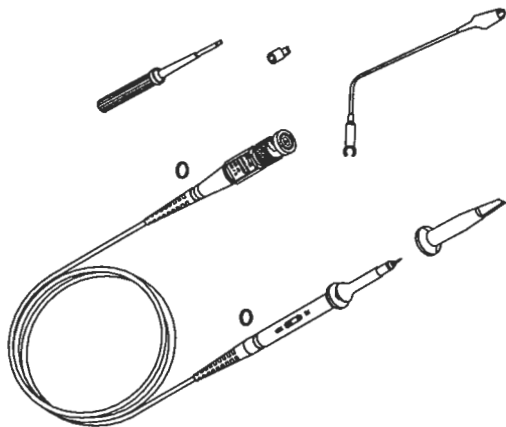

CE

Oscilloscope Probe Kit

The **HanTek** PP-80、PP-150、PP-200 probe is a passive, low-impedance attenuation probe.

The probe has been designed and calibrated for use on instruments having an input impedance of $1\text{M}\Omega$ paralleled by 20pF .

However, it may be recalibrated for use on instruments having an input capacitance of 15 to 40pF .

The probe incorporates a two position (1X, 10X) slide switch in the compensating network and cable length of 1.2 meters.

The specification is as follows.

Table 1
ELECTRICAL CHARACTERISTICS

Temperature -15°C to 70°C

	PP-80	PP-150	PP-200
Characteristic	Performance Requirements		
Attenuation	X1	X10	
Input Capacity	85pF~115pF	18.5pF~22.5pF	
Oscilloscope Input capacity	15pF~40pF		
Input Resistance	X1: 1M Ω \pm 2%	X10: 10M Ω \pm 2%	
Band width	X1: DC-6MHz X10: DC-60MHz/100MHz/200MHz		
Max input Voltage	X1:<200V DC+Peak AC X10:<600V DC+Peak AC		

Table 2
PHYSICAL CHARACTERISTICS

Characteristic	Performance Requirements
Probe Body	95mm
Coaxial Cable	1200mm
Weight	55g(max)

Standard Accessories

1. Probe Tip 1pcs
2. Ground Lead 1pcs
3. Marker Ring 2pcs
4. TipLocatingSleeve. 1pcs
5. Adjustment Tool 1pcs

Note:

Content of this document are subject to change without notice.