


# USB-4702

# USB-4704

**10 kS/s, 12-bit, 8-ch Multifunction DAQ USB Module**

**48 kS/s, 14-bit, 8-ch Multifunction DAQ USB Module**

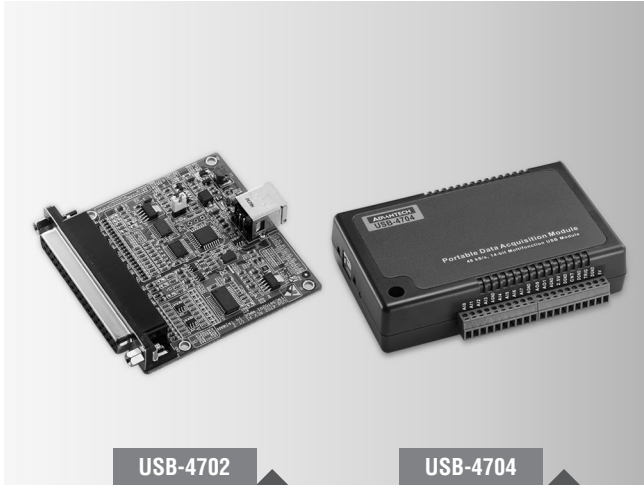

USB-4702

USB-4704



## Features

- Supports USB 2.0
- Portable
- Bus-powered
- 8 analog input channels
- 12-bit (USB-4702), 14-bit (USB-4704) resolution AI
- Sampling rates up to 10 kS/s (USB-4702), 48 kS/s (USB-4704)
- 8-ch DI/8-ch DO, 2-ch AO and one 32-bit counter

## Introduction

USB-4702/4704 are low-cost USB data acquisition modules. You no longer need to open the chassis to install DAQ modules. Just plug in the module, then get the data. It's easy to use and efficient. Reliable and rugged enough for industrial applications, yet affordable for home projects, USB-4702/4704 are the perfect way to add measurement and control capability to any USB capable computer. It obtains all required power from the USB port, so no external power connection is ever required. With the features of USB-4702/4704, they are your most cost effective choice of lab or production line test & measurement tool.

## Specifications

### Analog Input

- **Channels** 8 single-ended/4 differential (software programmable)
- **Resolution** USB-4702: Single-ended: 11 bits  
Differential: 12 bits  
SUB-4704: Single-ended: 13 bits  
Differential: 14 bits
- **Max. Sampling Rate** USB-4702: 10 kS/s max.  
USB-4704: 48 kS/s max.

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels of USB-4702 are used, the sampling rate is  $10k/4 = 2.5$  kS/s per channel.

- **FIFO Size** 512 samples
- **Overvoltage Protection** 30 V<sub>p-p</sub>
- **Input Impedance** 127 k $\Omega$
- **Sampling Modes** Software, onboard programmable pacer, and external
- **Input Range (V, software programmable) & Absolute Accuracy**

Single Ended	$\pm 10$	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Differential	N/A	$\pm 1$	$\pm 1.25$	$\pm 2$	$\pm 2.5$	$\pm 4$	$\pm 5$	$\pm 10$	$\pm 20$
Absolute Accuracy (% of FSR)*	USB-4702	0.2	0.15	0.15	0.15	0.15	0.15	0.15	0.15
	USB-4704	0.15	0.1	0.1	0.1	0.1	0.1	0.15	0.15

\*:  $\pm 1$  LSB is added as the derivative for absolute accuracy

### Analog Output

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable) 0-5
- **Slew Rate** 0.7 V/ $\mu$ s
- **Driving Capability** 5 mA
- **Output Impedance** 51  $\Omega$
- **Operation Mode** Single output
- **Accuracy** Relative:  $\pm 12$  LSB  
Differential non-linearity:  $\pm 5$  LSB

### Digital Input

- **Channels** 8
- **Compatibility** 3.3 V/5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

### Digital Output

- **Channels** 8
- **Compatibility** TTL
- **Output Voltage** Logic 0: 0.4 V max.@ 4 mA (sink)  
Logic 1: 3.5 V min.@ 4 mA (source)

### Counter

- **Channels** 1
- **Resolution** 32 bits
- **Compatibility** 3.3 V/TTL
- **Max. Input Frequency** 5 MHz

### General

- **Bus Type** USB 2.0
- **I/O Connector** USB-4702: 1 x DB37 female connector  
USB-4704: Onboard screw terminal
- **Dimensions (L x W)** USB-4702: 70 x 70 mm (2.76" x 2.76")  
USB-4704: 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **Power Consumption** Typical: 5 V @ 100 mA  
Max.: 5 V @ 500 mA
- **Operating Temperature** 0 ~ 55°C (32 ~ 131°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

## Ordering Information

- **USB-4702-AE** 10 kS/s, 12-bit, 8-ch Multi. USB Module
- **USB-4704-AE** 48 kS/s, 14-bit, 8-ch Multi. USB Module

### Accessories

- **PCL-10137-1E** DB37 Cable, 1m
- **PCL-10137-2E** DB37 Cable, 2m
- **PCL-10137-3E** DB37 Cable, 3m
- **ADAM-3937-BE** DB37 DIN-rail Wiring Board
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mount Bracket