

Type BLC-09-GT

Fuse Block

ANE / ANF Limiter Fuses



www.optifuse.com

(619) 593-5050

Specifications:

Voltage Rating: 125 VAC, 80 VDC
Max Current Rating: 500A
Fuse Type: ANE / ANF Limiter Fuse
Insulation Resistance @ 500V DC: 100MΩ Min.
Base: Polyester Impact/Electrical - Black
 with Mineral and Glass Fiber Added.
 ULR Certification number E40654
Terminals: Low Carbon Steel, Zinc Finish
Ambient Temperature : -40°C ~ +125°C

Hardware Specifications



Item	Qty	Description
1	2	Nut, Nylock 5/16-24UNF
2	2	Lock Washer, 5/16
3	2	Washer, 5/16 SAE
4	2	Nut, Hex, Normal, 5/16-24UNF
5	2	Bolt, hex cap, 5/16-24 UNF x 1.25

Tightening Torques Stainless & ASTM Steels is metric thread:

Bolts M8 , Pitch: 1.25 14.2 N/mm2 8823N

For Cover: See BLC-09-GTC

Mechanical Dimensions: Inches [mm]

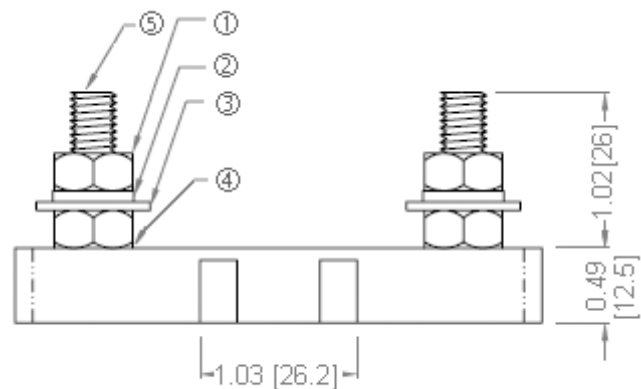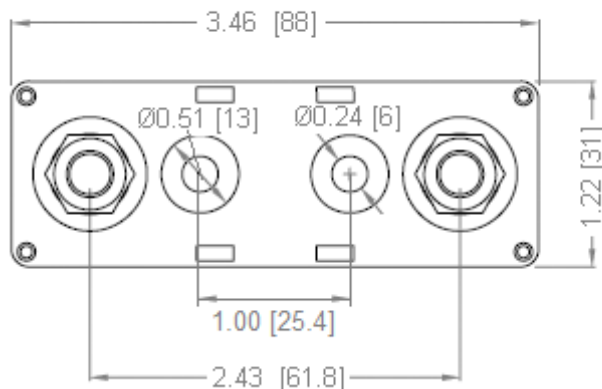

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev E 06/2018 - Page: 1/1
 Code G02-01H