

# Type BLC-16 Fuse Block For 1/4" x 1/4" (6.3 x 32mm) Fuses



www.optifuse.com

(619)-593-5050

**Fuse Style:** 1/4" x 1/4" (6.3 x 32mm) Fuses

**Material:**

**Body:** Thermostate (UL Flame: 94V-0)

**Fuse Clips:** Copper Alloy Tinned T:0.5mm

**Terminal:** Copper Alloy Tinned T:0.8mm

**Specifications:**

**Dielectric Strength** for 60 seconds: 1200VAC Min

**Suitable Rated Current:** 25A 250V

**Insulation resistance** at 500V DC: 500M Min.

**Temperature Rise:** 30 with dummy fuse, 85 with time-delay fuse



**Voltage Drop:** 15mV Max.

**Agency Standards and Listings:**




**Product Dimensions:** Inches [mm]


Part #	# of Pins/Legs	Terminals
<b>BLC-16-B</b>	<b>no</b>	<b>Bent</b>
<b>BLC-16-B1</b>	<b>1</b>	<b>Bent</b>
<b>BLC-16-B2</b>	<b>2</b>	<b>Bent</b>
<b>BLC-16-S</b>	<b>no</b>	<b>Straight</b>
<b>BLC-16-S1</b>	<b>1</b>	<b>Straight</b>
<b>BLC-16-S2</b>	<b>2</b>	<b>Straight</b>

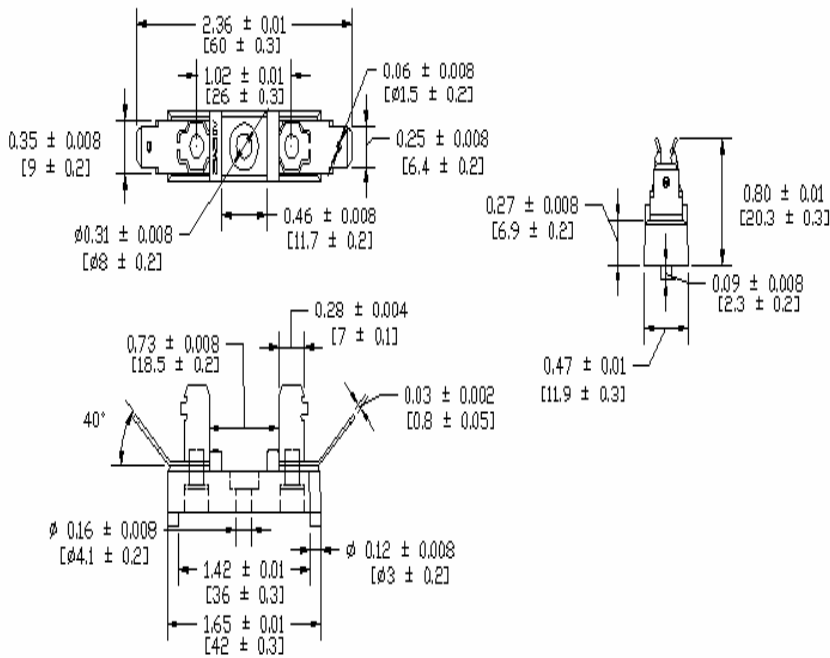


BLC-16-B




BLC-16-B1



0.77 ± 0.01  
[19.5 ± 0.2]



BLC-16-B2



0.77 ± 0.01 [19.5 ± 0.2]      0.77 ± 0.01 [19.5 ± 0.2]





Note: All specifications subject to change without notice.

# Type BLC-16 Fuse Block For 1/4" x 1 1/4" (6.3 x 32mm) Fuses




www.optifuse.com


(619)-593-5050

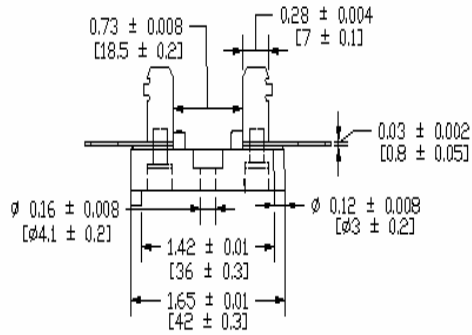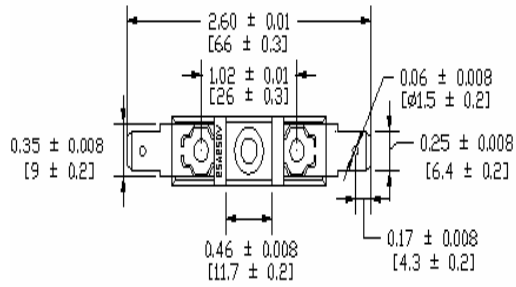


BLC-16-S




BLC-16-S1



0.77 ± 0.01  
[19.5 ± 0.2]



BLC-16-S2



0.77 ± 0.01  
[19.5 ± 0.2]

0.77 ± 0.01  
[19.5 ± 0.2]

## Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of Fuse Block with chemical solvent. Prolonged contact will damage the device performance.